


BETON TROWEL

CONCRETE FINISHING
& COMPACTION



ROTAPOKA INTERNAL PENDULUM FLEXIBLE DRIVE VIBRATOR

- Square frame protects engine plus AV mounts on engine deck protect the motor
- Quick engage/release twin claw coupling
- Shaft drive coupling interchangeable with Dynapac/Wacker/GCM/Belle Power units
- Flexshaft has armoured spirals both ends to protect the shaft
- Power options: Honda GX160 5,5hp, Yanmar Diesel L48 4,7hp, Ele

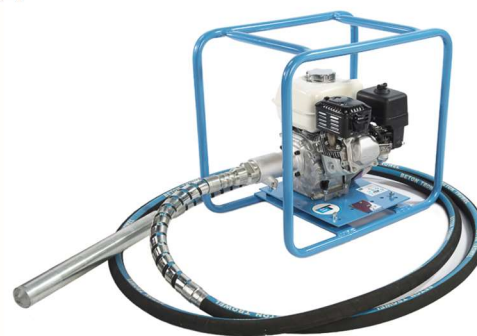

Model	BTRP25	BTRP35	BTRP50	BTRP60	BTRP35	BTRP50	BTRP60
Head Dia (mm)	25	35	50	60	35	50	60
Length (mm)	389	370	451	406	370	451	406
Hz	260	220	200	200	220	200	200
Frequency	15600	13200	12000	12000	13200	12000	12000
Amplitude (mm)	0,72	0,82	1,15	1,20	0,82	1,15	1,20
Shaft (M)	6	6	6	6	12	12	12
Shaft Diameter (mm)	24	30	36	36	30	36	36
Coupling	Twin claw	Twin claw	Twin claw	Twin claw	Twin claw	Twin claw	Twin claw

